


Always. Reliable. Tight.

Fibre cement wall sleeve split

FZRG200/300

Article no.: 1802200300

Consisting of two half-shells for retrofit sealing of media lines that have already been laid. For setting in concrete or mortar. Grooves all the way around the outside ensure a tight and force-fit bond with the wall.

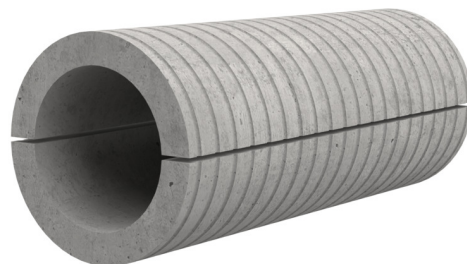

Picture may differ from selected product

FACTS

Application range:

- Waterproof concrete stress class 1, Waterproof concrete stress class 2


Advantages:

- Split design for retrofit installation in break-throughs for media lines that have already been laid
- Suitable for all types of wall
- Optimum connection with the concrete
- Asbestos-free

FEATURES

Wall sleeve ID (mm):	200
Wall sleeve OD (mm):	≤ 250
Optimal application range OD (mm):	110 – 162
Max. possible application range (mm):	0 – 171
Wall thickness (mm):	300

PICTURES

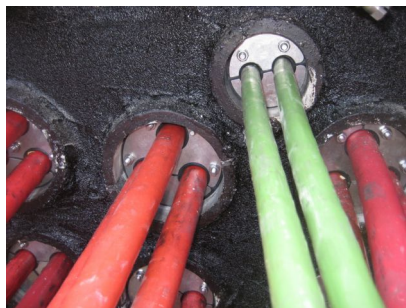

ACCESSORIES REQUIRED



Assembly kit