




UFI 41 50 → 600 mm






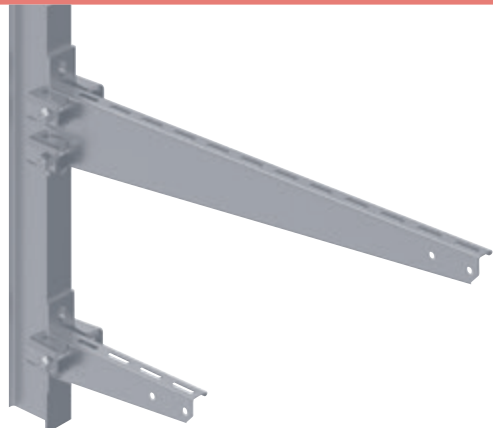




42 → 98 mm = 80 daN.m
106 → 135 mm = 70 daN.m



UFI41			$\overrightarrow{L}$ mm	$\overrightarrow{H}$ mm	 daN.m	GS	GC	304L	316L
		UFI41	-	-	70/80	-	595 353	-	-
C41S					$\downarrow F$ daN				
		C41S150	150	130	500	-	595 013	-	595 014
		C41S200	200	130	450	-	595 023	-	595 024
		C41S300	300	130	340	-	595 033	-	595 034
		C41S400	400	130	270	-	595 043	-	595 044
		C41S500	500	130	270	-	595 053	-	595 054
		C41S600	600	130	220	-	595 063	-	595 064

CCRP 50 → 600 mm





CCRP			$\overrightarrow{L}$ mm	$\overrightarrow{H}$ mm	$\downarrow F$ daN	GS	ZnL	304L	316L
		CCRP	-	-	-	-	557 203	-	-
CRP							GC		
		CRP 100	119	93	70	-	557 213	-	-
		CRP 200	219	103	170	-	557 233	-	-
		CRP 300	319	111	270	-	557 243	-	-
		CRP 400	419	121	210	-	557 253	-	-
		CRP 500	519	128	190	-	557 263	-	-
		CRP 600	619	138	170	-	557 273	-	-
		CRP 700	719	145	200	-	557 383	-	-